

RED RIVER ALLUVIAL AQUIFER SUMMARY, 2016

AQUIFER SAMPLING AND ASSESSMENT PROGRAM



APPENDIX 3 TO THE 2018 TRIENNIAL SUMMARY REPORT
PARTIAL FUNDING PROVIDED BY THE CWA



Contents

BACKGROUND	4
GEOLOGY	4
HYDROGEOLOGY	4
PROGRAM PARAMETERS	5
INTERPRETATION OF DATA	6
Field and Conventional Parameters.....	6
Inorganic Parameters	6
Volatile Organic Compounds	7
Semi-Volatile Organic Compounds.....	7
Pesticides and PCBs	7
WATER QUALITY TRENDS AND COMPARISON TO HISTORICAL ASSET DATA.....	8
SUMMARY AND RECOMMENDATIONS	8
Table 3-1: List of Wells Sampled, Red River Alluvial Aquifer – FY 2016	9
Table 3-2: Summary of Field and Conventional Data, Red River Alluvial Aquifer – FY 2016	10
Table 3-3: Summary of Inorganic Data, Red River Alluvial Aquifer – FY 2016	10
Table 3-4: FY 2016 Field and Conventional Statistics, ASSET Wells	11
Table 3-5: FY 2016 Inorganic Statistics, ASSET Wells	11
Table 3-6: Triennial Field and Conventional Statistics, ASSET Wells	12
Table 3-7: Triennial Inorganic Statistics, ASSET Wells	12
Table 3-8: VOC Analytical Parameters	13
Table 3-9: SVOC Analytical Parameters.....	14
Table 3-10: Pesticides and PCBs	16
Figure 3-1: Location Plat, Red River Alluvial Aquifer	17
Chart 3-1: Temperature Trend	18
Chart 3-2: pH Trend	18
Chart 3-3: Specific Conductance Trend.....	19
Chart 3-4: Field Salinity Trend	19
Chart 3-5: Chloride Trend	20
Chart 3-6: Total Dissolved Solids Trend	20
Chart 3-7: Alkalinity Trend.....	21
Chart 3-8: Hardness Trend	21
Chart 3-9: Sulfate Trend.....	22

Chart 3-10: Color Trend 22
Chart 3-11: Ammonia Trend..... 23
Chart 3-12: Nitrite - Nitrate Trend..... 23
Chart 3-13: Total Kjeldahl Trend 24
Chart 3-14: Total Phosphorus Trend 24
Chart 3-15: Barium Trend 25
Chart 3-16: Copper Trend 25
Chart 3-17: Iron Trend..... 26
Chart 3-18: Zinc Trend 26



BACKGROUND

The Louisiana Department of Environmental Quality's (LDEQ) Aquifer Sampling and Assessment Program (ASSET) is an ambient monitoring program established to determine and monitor the quality of groundwater produced from Louisiana's major freshwater aquifers. The ASSET Program samples approximately 200 water wells located in 14 aquifers across the state. The sampling process is designed so that all fourteen aquifers are monitored on a rotating basis, within a three-year period so that each well is monitored every three years.

In order to better assess the water quality of a particular aquifer, an attempt is made to sample all ASSET Program wells producing from it in a narrow time frame. To more conveniently and economically promulgate those data collected, a summary report on each aquifer is prepared separately. Collectively, these aquifer summaries make up, in part, the ASSET Program's Triennial Summary Report.

Analytical and field data contained in this summary were collected from wells producing from the Red River Alluvial aquifer, during the 2016 state fiscal year (July 1, 2015 - June 30, 2016). This summary will become Appendix 3 of ASSET Program Triennial Summary Report for 2018.

These data show that from November 2015 through February 2016, four wells were sampled which produce from the Red River Alluvial aquifer. Two are classified as irrigation and two are classified as domestic. The wells are in three parishes along the Red River in northwest Louisiana.

Figure 3-1 shows the geographic locations of the Red River Alluvial aquifer and the associated wells, whereas Table 3-1 lists the wells sampled along with their total depths, use made of produced waters, and date sampled.

Well data for registered water wells were obtained from the Louisiana Department of Resources' water well registration data file.

GEOLOGY

Red River alluvium consists of fining upward sequences of gravel, sand, silt, and clay. The aquifer is poorly to moderately well sorted, with fine-grained to medium-grained sand near the top, grading to coarse sand and gravel in the lower portions. It is confined by layers of silt and clay of varying thicknesses and extent.

HYDROGEOLOGY

The Red River Alluvial aquifer is hydraulically connected with the Red River and its major streams. Recharge is accomplished by direct infiltration of rainfall in the river valley, lateral and upward movement of water from adjacent and underlying aquifers, and overbank stream flooding. The amount of recharge from rainfall depends on the thickness and permeability of the silt and clay layers overlying it. Water levels fluctuate seasonally in response to precipitation trends and river stages. Water levels are generally within 30 to 40 feet of the land surface and

movement is downgradient and toward rivers and streams. Natural discharge occurs by seepage of water into the Red River and its streams, but some water moves into the aquifer when stream stages are above aquifer water levels. The hydraulic conductivity varies between 10 and 530 feet/day.

The maximum depths of occurrence of freshwater in the Red River Alluvial range from 20 feet above sea level, to 160 feet below sea level. The range of thickness of the freshwater interval in the Red River Alluvial is 50 to 200 feet. The depths of the Red River Alluvial wells that were monitored in conjunction with the ASSET Program range from 47 to 89 feet.

PROGRAM PARAMETERS

The field parameters checked at each ASSET well sampling site and the list of conventional parameters analyzed in the laboratory are shown in Table 3-2. The inorganic parameters analyzed in the laboratory are listed in Table 3-3. These tables also show the field and analytical results determined for each analyte. For quality control, a duplicate sample was collected from well NA-5404Z.

In addition to the field, conventional and inorganic analytical parameters, the target analyte list includes three other categories of compounds: volatiles, semi-volatiles, and pesticides/PCBs. Due to the large number of analytes in these categories, tables were not prepared showing the analytical results for these compounds. A discussion of any detections from any of these three categories, if necessary, can be found in their respective sections. Tables 3-8, 3-9 and 3-10 list the target analytes for volatiles, semi-volatiles and pesticides/PCBs, respectively.

Tables 3-4 and 3-5 provide a statistical overview of field and conventional data, and inorganic data for the Red River Alluvial aquifer, listing the minimum, maximum, and average results for these parameters collected in the FY 2016 sampling. Tables 3-6 and 3-7 compare these same parameter averages to historical ASSET-derived data for the Red River Alluvial aquifer, from fiscal years 1995, 1998, 2001, 2004, 2007, 2010, and 2013.

The average values listed in the above referenced tables are determined using all valid, reported results, including those reported as non-detect, or less than the detection limit (< DL). Per Departmental policy concerning statistical analysis (including contouring purposes), one-half the DL is used in place of zero when non-detects are encountered. However, the minimum value is reported < DL, not one-half the DL. If all values for a particular analyte are reported as < DL, then the minimum, maximum, and average values are all reported as < DL.

Due to the variability in the laboratory's reporting detection limits caused by dilution factors, whenever an analyte in question is not detected, the standard reporting detection limit value for each analytical method is used as the DL when performing statistical calculations.

Charts 3-1 through 3-18 represent the trend of the graphed parameter, based on the averaged value of that parameter for each three-year reporting period. Discussion of historical data and

related trends is found in the **Water Quality Trends and Comparison to Historical ASSET Data** section.

INTERPRETATION OF DATA

Under the Federal Safe Drinking Water Act, EPA has established maximum contaminant levels (MCLs) for pollutants that may pose a health risk in public drinking water. An MCL is the highest level of a contaminant that EPA allows in public drinking water. MCLs ensure that drinking water does not pose either a short-term or long-term health risk. While not all wells sampled were public supply wells, the ASSET Program uses MCLs as a benchmark for further evaluation.

EPA has set Secondary MCLs (SMCLs), which are defined as non-enforceable taste, odor, or appearance guidelines. Field and laboratory data contained in Tables 3-2 and 3-3 show that one or more SMCLs were exceeded in all of the four wells sampled in the Red River Alluvial aquifer, with a total of seven SMCLs being exceeded.

Field and Conventional Parameters

Table 3-2 shows the field and conventional parameters for which samples are collected at each well and the analytical results for those parameters. Table 3-4 provides an overview of this data for the Red River Alluvial aquifer, listing the minimum, maximum, and average results for these parameters.

Federal Primary Drinking Water Standards: A review of the analysis listed in Table 3-2 shows that no MCL was exceeded for field or conventional parameters for this reporting period. Those ASSET wells reporting turbidity levels greater than 1.0 NTU do not exceed the MCL of 1.0, as this standard applies to public supply water wells that are under the direct influence of surface water. The Louisiana Department of Health has determined that no public water supply well in Louisiana was in this category.

Federal Secondary Drinking Water Standards: A review of the analysis listed in Table 3-2 shows that three wells exceeded the SMCL for total dissolved solids. Laboratory results override field results in exceedance determinations, thus only lab results will be counted in determining SMCL exceedance numbers for TDS. Following is a list of SMCL parameter exceedances with well number and results:

Total Dissolved Solids (SMCL = 500 mg/L or 0.5 g/L):

	<u>LAB RESULTS (in mg/L)</u>	<u>FIELD MEASURES (in g/L)</u>
CD-11849Z	960 mg/L	(Not Measured)
NA-5404Z	510 mg/L, Duplicate 550 mg/L	0.620 g/L, Duplicate 0.620 g/L
RR-345	685 mg/L	0.736 g/L

Inorganic Parameters

Table 3-3 shows the inorganic parameters for which samples are collected at each well and the analytical results for those parameters. Table 3-5 provides an overview of inorganic data for the Red River Alluvial aquifer, listing the minimum, maximum, and average results for these parameters.

Federal Primary Drinking Water Standards: A review of the analyses listed on Table 3-3 shows that no primary MCL was exceeded for inorganics.

Federal Secondary Drinking Water Standards: Laboratory data contained in Table 3-3 shows that all 4 wells exceeded the SMCL for iron:

Iron (SMCL = 300 µg/L):

CD-859	5880 µg/L
CD-11849Z	4150 µg/L
NA5404A	13500 µg/L (Duplicate – 13700 µg/L)
RR-345	7520 µg/L

Volatile Organic Compounds

Table 3-8 shows the volatile organic compound (VOC) parameters for which samples are collected at each well. Due to the number of analytes in this category, analytical results are not tabulated; however, any detection of a VOC would be discussed in this section.

Well RR-345 had a reported detection of benzene at 0.56 µg/L, which is below the 5.0 µg/L MCL for benzene. There were no other confirmed detections of a VOC at or above its detection limit during the FY 2016 sampling of the Red River Alluvial aquifer.

Semi-Volatile Organic Compounds

Table 3-9 shows the semi-volatile organic compound (SVOC) parameters for which samples are collected at each well. Due to the number of analytes in this category, analytical results are not tabulated; however, any detection of a SVOC would be discussed in this section.

Well RR-345 also had a reported detection of diethyl phthalate at 19.3 µg/L. There is no MCL established for this compound. There were no other confirmed detections of a SVOC at or above its detection limit during the FY 2016 sampling of the Red River Alluvial aquifer.

Pesticides and PCBs

Table 3-10 shows the pesticide and PCB parameters for which samples are collected at each well. Due to the number of analytes in this category, analytical results are not tabulated; however, any detection of a pesticide or PCB would be discussed in this section.

There were no confirmed detections of a pesticide or PCB at or above its detection limit during the FY 2016 sampling of the Red River Alluvial aquifer.

WATER QUALITY TRENDS AND COMPARISON TO HISTORICAL ASSET DATA

Analytical and field data show that the quality and characteristics of groundwater produced from the Red River Alluvial aquifer exhibit some changes when comparing current data to that of the seven previous sampling rotations. These comparisons can be found in Tables 3-6 and 3-7, and in Charts 3-1 to 3-20 of this summary. Increasing or decreasing trend statements made here are based on an R-square value (slope) of 0.03 or greater. An R-square value of less than 0.03 is considered to have only a slight or no change.

Over the 21-year period, five analytes have shown a general increase in concentration. These analytes are pH, field total dissolved solids, total phosphorus, barium, and iron. For this same time period, 12 analytes have demonstrated a decrease in concentrations: temperature, specific conductance (field and lab), salinity, lab total dissolved solids, alkalinity, hardness, sulfate, color, ammonia, total Kjeldahl nitrogen, copper, and zinc. All other analytes have demonstrated only slight change or have remained consistent for this time period. The differing trends for field and lab total dissolved solids is likely due to field data for this parameter not being measured for the first three rotations of the ASSET Program. When comparing concurrent data, both parameters show an increasing trend.

Current sample results show that all four wells reported one or more secondary exceedances with a total of seven SMCL exceedances. The FY 2013 sampling of the Red River Alluvial aquifer shows that all five wells also reported one or more SMCL exceedances with a total of 12 exceedances.

SUMMARY AND RECOMMENDATIONS

In summary, the data show that the groundwater produced from this aquifer is very hard¹ but is of good quality when considering short-term or long-term health risk guidelines. Laboratory data show that no program well that was sampled during the Fiscal Year 2016 monitoring of the Red River Alluvial aquifer exceeded a primary MCL. The data also show that this aquifer is of poor quality when considering taste, odor, or appearance guidelines, with at least one secondary MCL being exceeded in each of the wells monitored and with detections of the two organic compounds.

Comparison to historical ASSET-derived data shows some change in the quality or characteristics of the Red River Alluvial aquifer, with five parameters showing consistent increases in concentration and 12 parameters decreasing in concentration.

It is recommended that the wells assigned to the Red River Alluvial aquifer be re-sampled as planned in approximately three years. In addition, several wells should be added to those currently in place to increase the well density for this aquifer.

¹ Classification based on hardness scale from: Peavy, H.S. et al. *Environmental Engineering*. New York: McGraw-Hill. 1985.

Table 3-1: List of Wells Sampled, Red River Alluvial Aquifer – FY 2016

Well ID	Parish	Date	Owner	Depth (Feet)	Well Use
CD-859	CADD0	01/19/2016	East Ridge Country Club	58	Irrigation
CD-11849Z	CADD0	01/20/2016	Private Owner	47	Domestic
NA-5404Z	NATCHITOCHEs	02/16/2016	Seven C's Ranch	76	Domestic
RR-345	RED RIVER	11/12/2015	Bundrick Farms	89	Irrigation

Table 3-2: Summary of Field and Conventional Data, Red River Alluvial Aquifer – FY 2016

Well ID	pH	Sal	Sp Cond	Temp	TDS	Alk	Cl	Color	Hard	Nitrite-Nitrate	NH3	Tot P	Sp Cond	SO4	TDS	TKN	TSS	Turb
	SU	ppt	mmhos/cm	Deg C	g/L	mg/L	mg/L	PCU	mg/L	(as N) mg/L	mg/L	mg/L	µmhos/cm	mg/L	mg/L	mg/L	mg/L	NTU
	Laboratory Reporting Limits →					2	1	5	1	0.05	0.1	0.05	1	1	10	0.1	4	0.5
Field Parameters					Laboratory Parameters													
CD-859	FIELD PARAMETERS NOT MEASURED					517	7.8	10	370	< DL	< DL	0.37	698	17.7	460	0.56	15	70.0
CD-11849Z	FIELD PARAMETERS NOT MEASURED					460	125.0	10	640	< DL	0.15	0.40	1360	180.0	960	0.85	4	43.8
NA-5404Z	6.72	0.47	0.954	16.79	0.620	371	83.0	10	320	0.06	1.70	1.20	797	< DL	510	2.20	30	199.0
NA-5404Z*	6.72	0.47	0.954	16.79	0.620	393	83.2	15	330	0.05	1.60	1.10	919	< DL	550	2.10	27	258.0
RR-345	7.09	0.57	1.132	18.37	0.736	674	28.3	10	490	< DL	0.78	0.59	898	56.5	685	1.30	25	61.0

Shaded cells exceed EPA Secondary Standards

Table 3-3: Summary of Inorganic Data, Red River Alluvial Aquifer – FY 2016

Well ID	Antimony	Arsenic	Barium	Beryllium	Cadmium	Chromium	Copper	Iron	Lead	Mercury	Nickel	Selenium	Silver	Thallium	Zinc
Laboratory Reporting Limits	1	1	1	0.5	1	1	3	50	1	0.2	1	1	0.5	0.5	5
CD-859	< DL	< DL	352	< DL	< DL	< DL	< DL	5880	< DL	< DL	< DL	< DL	< DL	< DL	< DL
CD-11849Z	< DL	7.1	143	< DL	< DL	< DL	< DL	4150	< DL	< DL	< DL	< DL	< DL	< DL	< DL
NA-5404Z	< DL	< DL	559	< DL	< DL	< DL	4.3	13500	< DL	< DL	< DL	< DL	< DL	< DL	< DL
NA-5404Z*	< DL	< DL	549	< DL	< DL	3.3	7.9	13700	< DL	< DL	< DL	< DL	< DL	< DL	< DL
RR-345	< DL	< DL	410	< DL	< DL	< DL	21.9	7520	< DL	< DL	< DL	< DL	< DL	< DL	< DL

Shaded cells exceed EPA Secondary Standards

Table 3-4: FY 2016 Field and Conventional Statistics, ASSET Wells

	PARAMETER	MINIMUM	MAXIMUM	AVERAGE
FIELD	pH (SU)	6.72	7.09	6.84
	Salinity (ppt)	0.47	0.57	0.50
	Specific Conductance (mmhos/cm)	0.954	1.132	1.013
	Temperature (°C)	16.79	18.37	17.32
	Total Dissolved Solids (g/L)	0.620	0.736	0.659
LABORATORY	Alkalinity (mg/L)	371	674	483
	Chloride (mg/L)	7.8	125.0	65.5
	Color (PCU)	10	15	11
	Hardness (mg/L)	320	640	430
	Nitrite - Nitrate, as N (mg/L)	< DL	0.06	< DL
	Ammonia, as N (mg/L)	< DL	1.70	0.86
	Total Phosphorus (mg/L)	0.37	1.20	0.73
	Specific Conductance (µmhos/cm)	698	1360	934
	Sulfate (mg/L)	< DL	180.0	51.0
	Total Dissolved Solids (mg/L)	460	960	633
	Total Kjeldahl Nitrogen (mg/L)	0.56	2.20	1.40
	Total Suspended Solids (mg/L)	4	30	20
	Turbidity (NTU)	43.8	258.0	126.4

Table 3-5: FY 2016 Inorganic Statistics, ASSET Wells

PARAMETER	MINIMUM	MAXIMUM	AVERAGE
Antimony (µg/L)	< DL	< DL	< DL
Arsenic (µg/L)	< DL	7.1	< DL
Barium (µg/L)	143	559	403
Beryllium (µg/L)	< DL	< DL	< DL
Cadmium (µg/L)	< DL	< DL	< DL
Chromium (µg/L)	< DL	3.1	1.1
Copper (µg/L)	< DL	21.9	7.4
Iron (µg/L)	4150	13700	8950
Lead (µg/L)	< DL	1.1	< DL
Mercury (µg/L)	< DL	< DL	< DL
Nickel (µg/L)	< DL	< DL	< DL
Selenium (µg/L)	< DL	< DL	< DL
Silver (µg/L)	< DL	< DL	< DL
Thallium (µg/L)	< DL	< DL	< DL
Zinc (µg/L)	< DL	< DL	< DL

Table 3-6: Triennial Field and Conventional Statistics, ASSET Wells

PARAMETER		AVERAGE VALUES BY FISCAL YEAR							
		FY 1995	FY 1998	FY 2001	FY 2004	FY 2007	FY 2010	FY 2013	FY 2016
FIELD	pH (SU)	6.67	6.81	7.64	7.22	7.02	7.04	7.42	6.84
	Salinity (ppt)	0.54	0.53	0.67	0.47	0.46	0.51	0.55	0.50
	Specific Conductance (mmhos/cm)	1.128	1.060	1.328	0.940	0.930	1.034	1.100	1.013
	Temperature (°C)	21.00	19.88	20.50	20.55	20.23	19.96	18.38	17.32
	Total Dissolved Solids (g/L)	-	-	-	0.610	0.610	0.670	0.715	0.659
LABORATORY	Alkalinity (mg/L)	504.4	485.2	446.0	476.0	457.0	486	414	483
	Chloride (mg/L)	45.3	42.8	163.4	31.8	25.5	50.8	74.6	65.5
	Color (PCU)	25	5	30	22	-	1	22	11
	Hardness (mg/L)	507	454	354	454	462	401	225	430
	Nitrite - Nitrate, as N (mg/L)	< DL	0.11	< DL	< DL	< DL	0.33	0.021	< DL
	Ammonia, as N (mg/L)	1.27	0.54	0.88	0.86	0.77	< DL	0.88	0.86
	Total Phosphorus (mg/L)	0.79	0.38	0.51	0.61	0.59	0.72	0.517	0.730
	Specific Conductance (µmhos/cm)	1,100	1,094	1,398	953	892	950	1,045	934
	Sulfate (mg/L)	69.3	62.2	52.1	29.9	18.3	14.2	55.0	51.0
	Total Dissolved Solids (mg/L)	716	699	818	594	517	607	663	633
	Total Kjeldahl Nitrogen (mg/L)	4.96	0.95	1.05	0.81	0.97	0.34	1.61	1.40
	Total Suspended Solids (mg/L)	19	14	12	17	16	18	17	20
	Turbidity (NTU)	56.0	54.4	44.7	68.3	73.6	75.7	57.4	126.4

Table 3-7: Triennial Inorganic Statistics, ASSET Wells

PARAMETER	AVERAGE VALUES BY FISCAL YEAR							
	FY 1995	FY 1998	FY 2001	FY 2004	FY 2007	FY 2010	FY 2013	FY 2016
Antimony (µg/L)	< DL	< DL	< DL	< DL	< DL	< DL	< DL	< DL
Arsenic (µg/L)	< DL	< DL	< DL	< DL	< DL	< DL	< DL	< DL
Barium (µg/L)	401	102	219	387	461	564	400	403
Beryllium (µg/L)	< DL	< DL	< DL	< DL	< DL	< DL	< DL	< DL
Cadmium (µg/L)	< DL	< DL	1.0	< DL	< DL	< DL	< DL	< DL
Chromium (µg/L)	12.4	< DL	< DL	< DL	< DL	< DL	< DL	1.1
Copper (µg/L)	19.9	968.7	< DL	10.3	< DL	< DL	< DL	7.4
Iron (µg/L)	6122	3340	3396	5977	7717	6281	5896	8950
Lead (µg/L)	32.0	< DL	< DL	14.0	< DL	< DL	< DL	< DL
Mercury (µg/L)	< DL	< DL	< DL	< DL	< DL	< DL	< DL	< DL
Nickel (µg/L)	10.4	1,041.4	< DL	< DL	< DL	< DL	< DL	< DL
Selenium (µg/L)	< DL	< DL	< DL	< DL	< DL	< DL	< DL	< DL
Silver (µg/L)	< DL	< DL	1.1	< DL	< DL	< DL	< DL	< DL
Thallium (µg/L)	< DL	< DL	< DL	< DL	< DL	< DL	< DL	< DL
Zinc (µg/L)	185.6	<10.0	41.7	65.5	490.0	13.4	< DL	< DL

Table 3-8: VOC Analytical Parameters

VOC ANALYTICAL PARAMETERS	METHOD	REPORTING LIMIT (µg/L)
1,1,1-TRICHLOROETHANE	624	0.50
1,1,2,2-TETRACHLOROETHANE	624	0.50
1,1,2-TRICHLOROETHANE	624	0.50
1,1-DICHLOROETHANE	624	0.50
1,1-DICHLOROETHENE	624	0.50
1,2-DICHLOROBENZENE	624	0.50
1,2-DICHLOROETHANE	624	0.50
1,2-DICHLOROPROPANE	624	0.50
1,3-DICHLOROBENZENE	624	0.50
1,4-DICHLOROBENZENE	624	0.50
BENZENE	624	0.50
BROMODICHLOROMETHANE	624	0.50
BROMOFORM	624	0.50
BROMOMETHANE	624	1.0
CARBON TETRACHLORIDE	624	0.50
CHLOROBENZENE	624	0.50
CHLOROETHANE	624	0.50
CHLOROFORM	624	0.50
CHLOROMETHANE	624	1.0
CIS-1,3-DICHLOROPROPENE	624	1.0
DIBROMOCHLOROMETHANE	624	0.50
ETHYL BENZENE	624	0.50
METHYLENE CHLORIDE	624	1.0
O-XYLENE (1,2-DIMETHYLBENZENE)	624	0.50
STYRENE	624	0.50
TERT-BUTYL METHYL ETHER	624	0.50
TETRACHLOROETHYLENE (PCE)	624	0.50
TOLUENE	624	0.50
TRANS-1,2-DICHLOROETHENE	624	0.50
TRANS-1,3-DICHLOROPROPENE	624	0.50
TRICHLOROETHYLENE (TCE)	624	0.50
TRICHLOROFLUOROMETHANE (FREON-11)	624	0.50
VINYL CHLORIDE	624	0.50
XYLENES, M & P	624	1.0

Table 3-9: SVOC Analytical Parameters

SVOC ANALYTICAL PARAMETERS	METHOD	REPORTING LIMIT (µg/L)
1,2,4-TRICHLOROBENZENE	625	5.0
2,4,6-TRICHLOROPHENOL	625	5.0
2,4-DICHLOROPHENOL	625	5.0
2,4-DIMETHYLPHENOL	625	5.0
2,4-DINITROPHENOL	625	20.0
2,4-DINITROTOLUENE	625	5.0
2,6-DINITROTOLUENE	625	5.0
2-CHLORONAPHTHALENE	625	5.0
2-CHLOROPHENOL	625	5.0
2-NITROPHENOL	625	5.0
3,3'-DICHLOROBENZIDINE	625	5.0
4,6-DINITRO-2-METHYLPHENOL	625	10.0
4-BROMOPHENYL PHENYL ETHER	625	5.0
4-CHLORO-3-METHYLPHENOL	625	5.0
4-CHLOROPHENYL PHENYL ETHER	625	5.0
4-NITROPHENOL	625	20.0
ACENAPHTHENE	625	0.20
ACENAPHTHYLENE	625	0.20
ANTHRACENE	625	0.20
BENZIDINE	625	20.0
BENZO(A)ANTHRACENE	625	0.20
BENZO(A)PYRENE	625	0.20
BENZO(B)FLUORANTHENE	625	0.20
BENZO(G,H,I)PERYLENE	625	0.20
BENZO(K)FLUORANTHENE	625	0.20
BENZYL BUTYL PHTHALATE	625	5.0
BIS(2-CHLOROETHOXY) METHANE	625	5.0
BIS(2-CHLOROETHYL) ETHER (2-CHLOROETHYL ETHER)	625	5.0
BIS(2-ETHYLHEXYL) PHTHALATE	625	5.0
CHRYSENE	625	0.20
DIBENZ(A,H)ANTHRACENE	625	0.20
DIETHYL PHTHALATE	625	5.0
DIMETHYL PHTHALATE	625	5.0
DI-N-BUTYL PHTHALATE	625	5.0
DI-N-OCTYLPHTHALATE	625	5.0
FLUORANTHENE	625	0.20
FLUORENE	625	0.20
HEXACHLOROBENZENE	625	5.0

SVOC ANALYTICAL PARAMETERS	METHOD	REPORTING LIMIT (µg/L)
HEXACHLOROBUTADIENE	625	5.0
HEXACHLOROCYCLOPENTADIENE	625	10.0
HEXACHLOROETHANE	625	5.0
INDENO(1,2,3-C,D)PYRENE	625	0.20
ISOPHORONE	625	5.0
NAPHTHALENE	625	0.20
NITROBENZENE	625	5.0
N-NITROSODIMETHYLAMINE	625	5.0
N-NITROSODI-N-PROPYLAMINE	625	5.0
N-NITROSODIPHENYLAMINE	625	5.0
PENTACHLOROPHENOL	625	5.00
PHENANTHRENE	625	0.20
PHENOL	625	5.0
PYRENE	625	0.20

Table 3-10: Pesticides and PCBs

Pest/PCB Analytical Parameters	METHOD	REPORTING LIMIT (µg/L)
ALDRIN	608	0.025
ALPHA BHC (ALPHA HEXACHLOROCYCLOHEXANE)	608	0.025
ALPHA ENDOSULFAN	608	0.025
ALPHA-CHLORDANE	608	0.025
BETA BHC (BETA HEXACHLOROCYCLOHEXANE)	608	0.025
BETA ENDOSULFAN	608	0.025
CHLORDANE	608	0.20
DELTA BHC (DELTA HEXACHLOROCYCLOHEXANE)	608	0.025
DIELDRIN	608	0.025
ENDOSULFAN SULFATE	608	0.025
ENDRIN	608	0.025
ENDRIN ALDEHYDE	608	0.025
ENDRIN KETONE	608	0.025
GAMMA-CHLORDANE	608	0.025
HEPTACHLOR	608	0.025
HEPTACHLOR EPOXIDE	608	0.025
METHOXYCHLOR	608	0.25
P,P'-DDD	608	0.025
P,P'-DDE	608	0.025
P,P'-DDT	608	0.025
PCB-1016 (AROCHLOR 1016)	608	0.80
PCB-1221 (AROCHLOR 1221)	608	0.80
PCB-1232 (AROCHLOR 1232)	608	0.80
PCB-1242 (AROCHLOR 1242)	608	0.80
PCB-1248 (AROCHLOR 1248)	608	0.80
PCB-1254 (AROCHLOR 1254)	608	0.80
PCB-1260 (AROCHLOR 1260)	608	0.80
TOXAPHENE	608	1.0

Figure 3-1: Location Plat, Red River Alluvial Aquifer

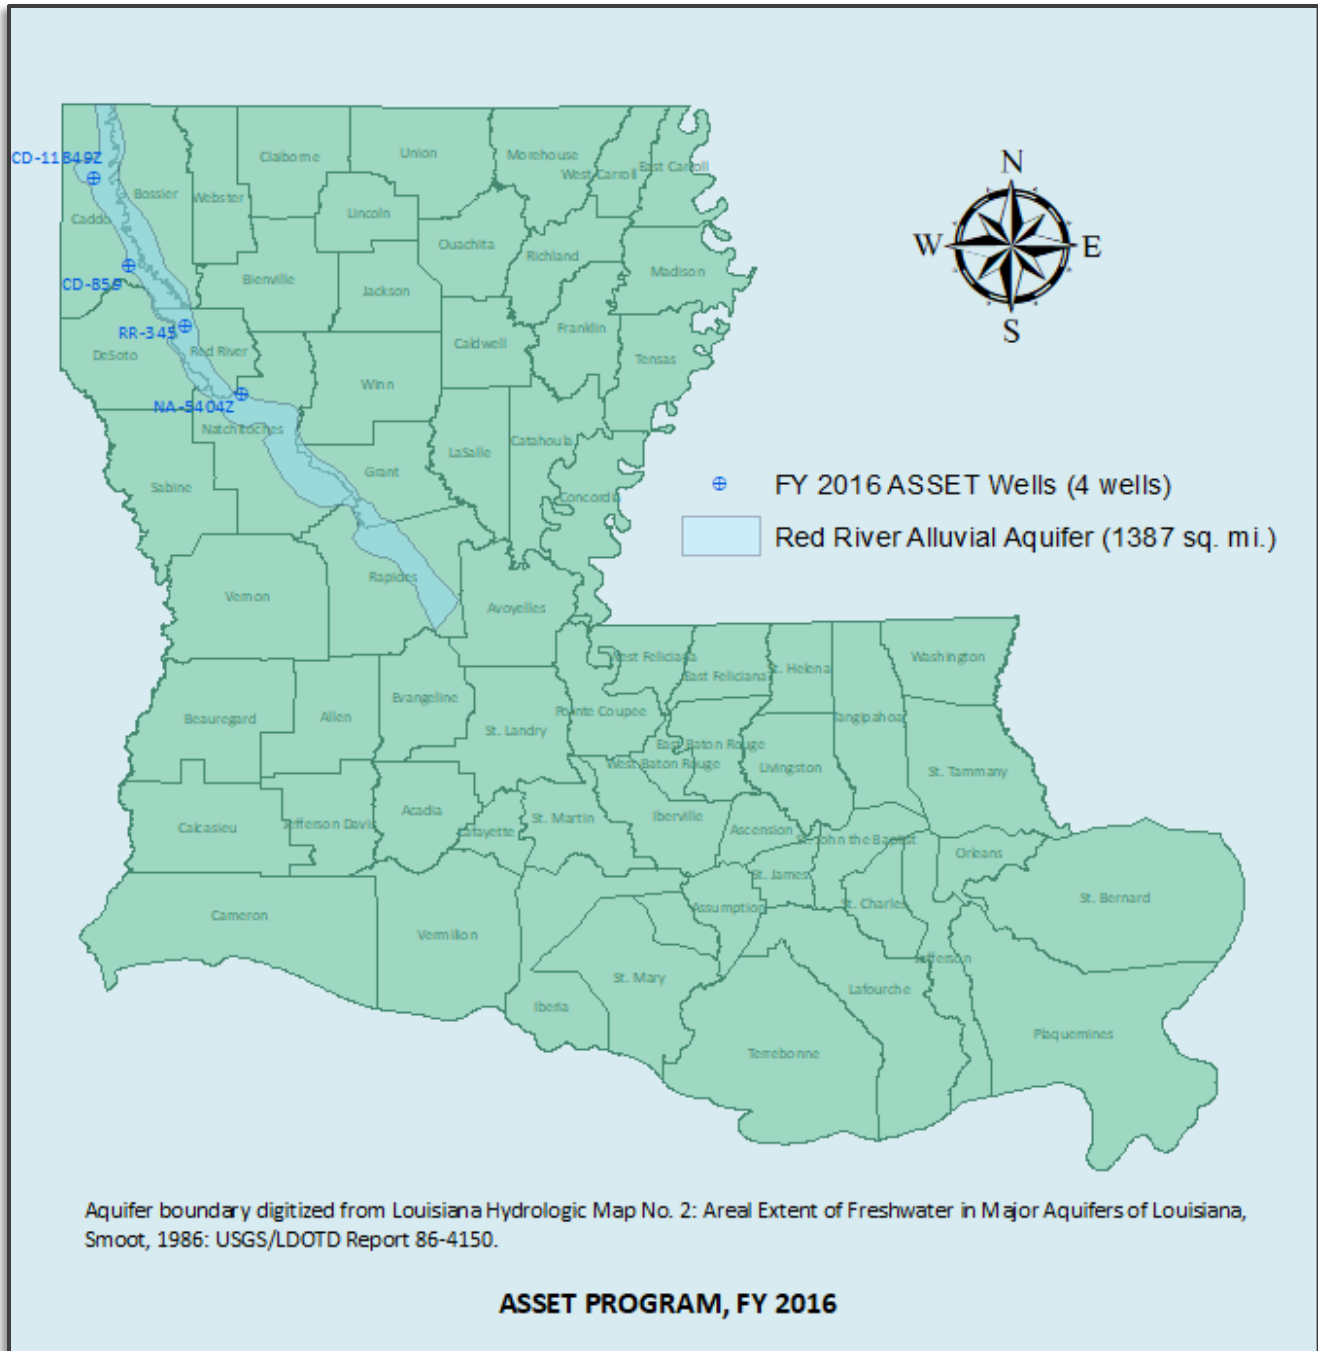


Chart 3-1: Temperature Trend

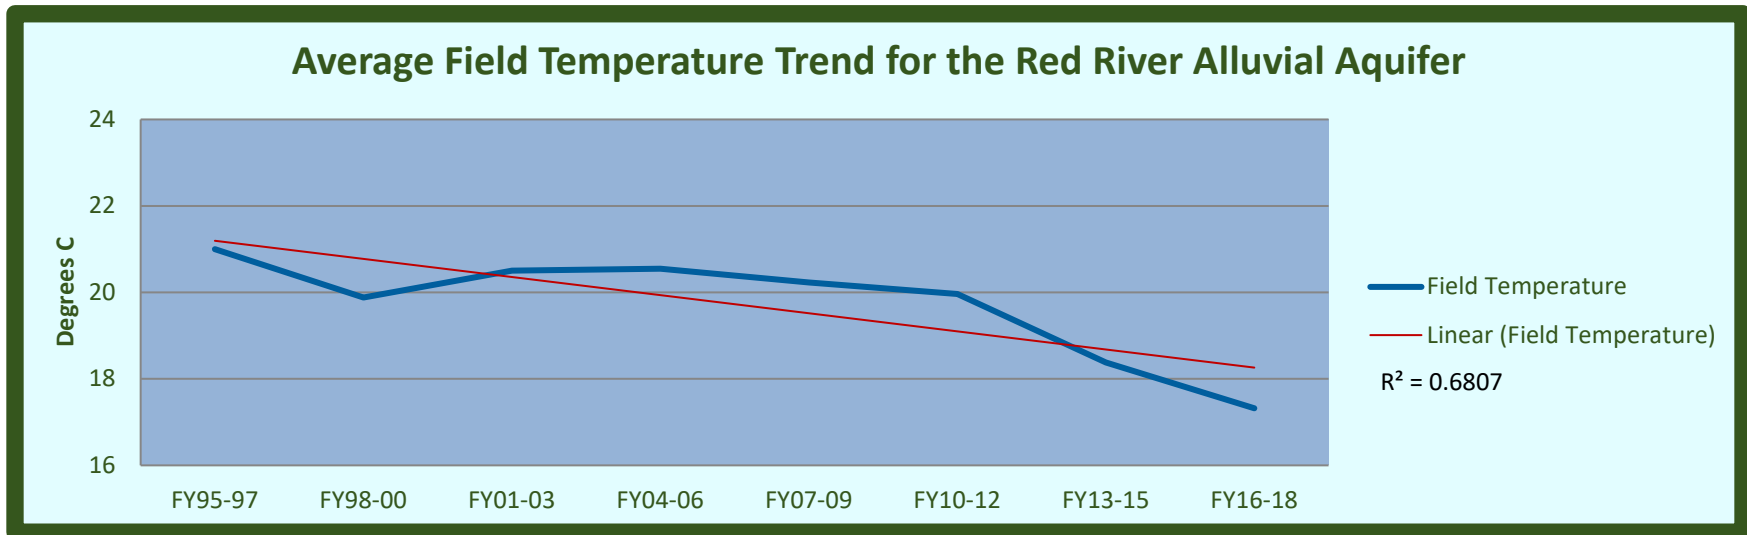


Chart 3-2: pH Trend

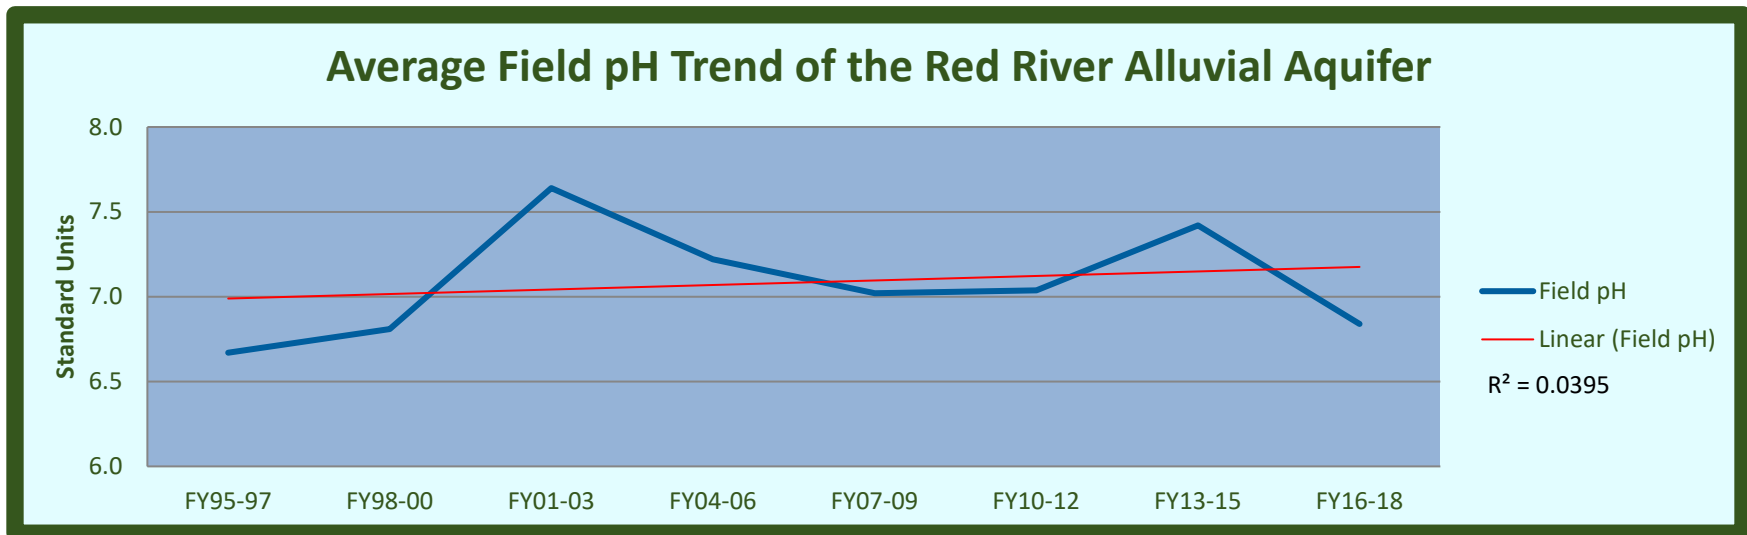


Chart 3-3: Specific Conductance Trend

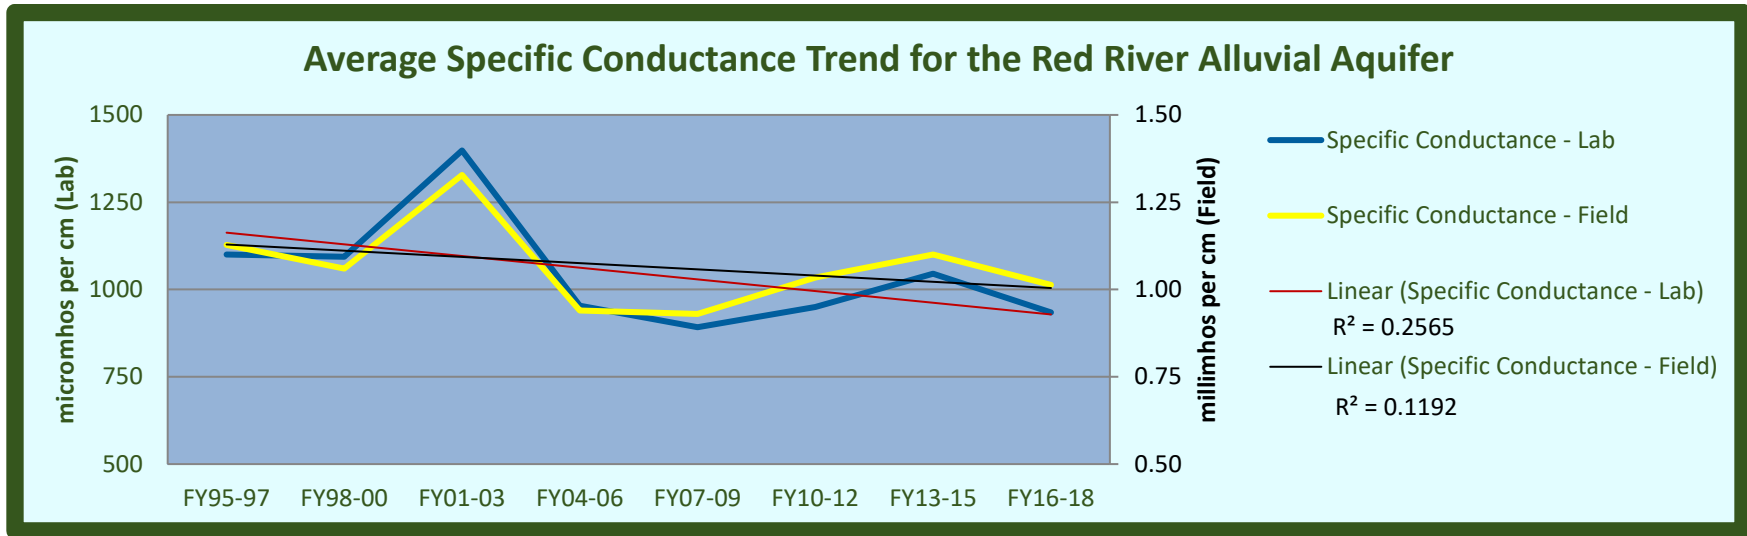


Chart 3-4: Field Salinity Trend

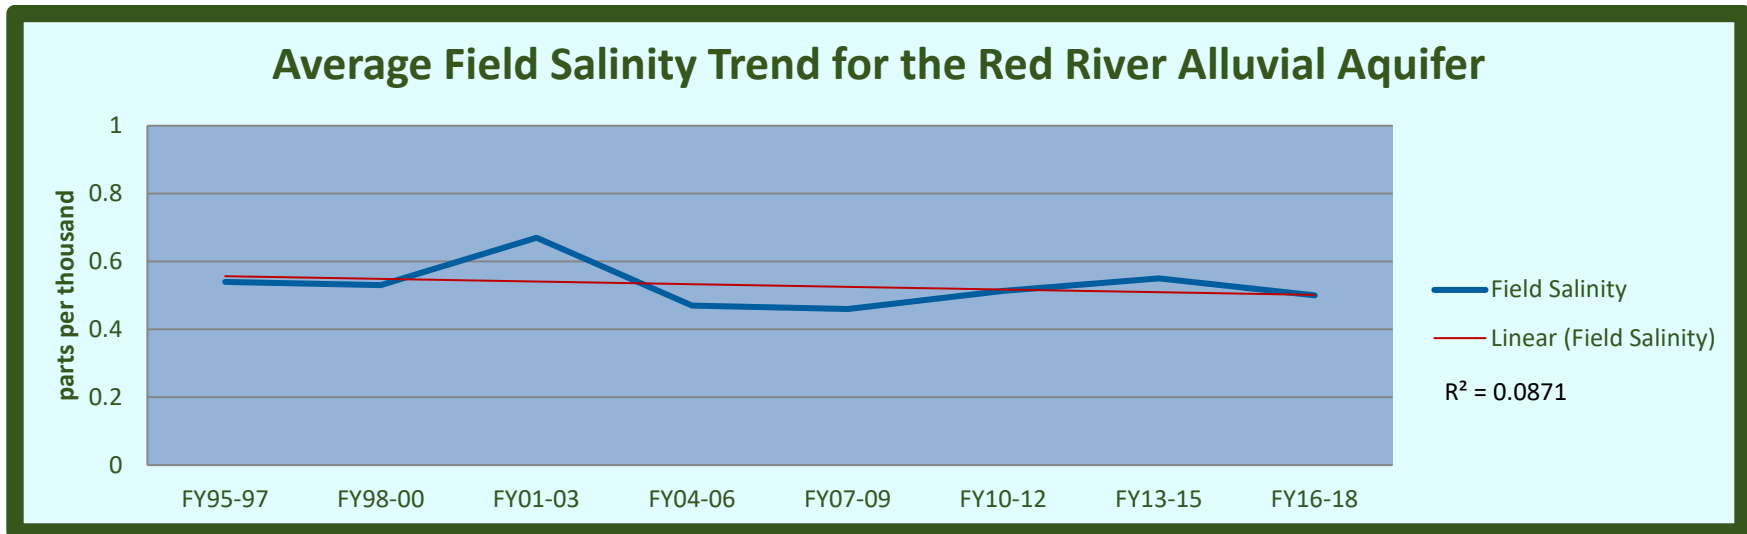


Chart 3-5: Chloride Trend

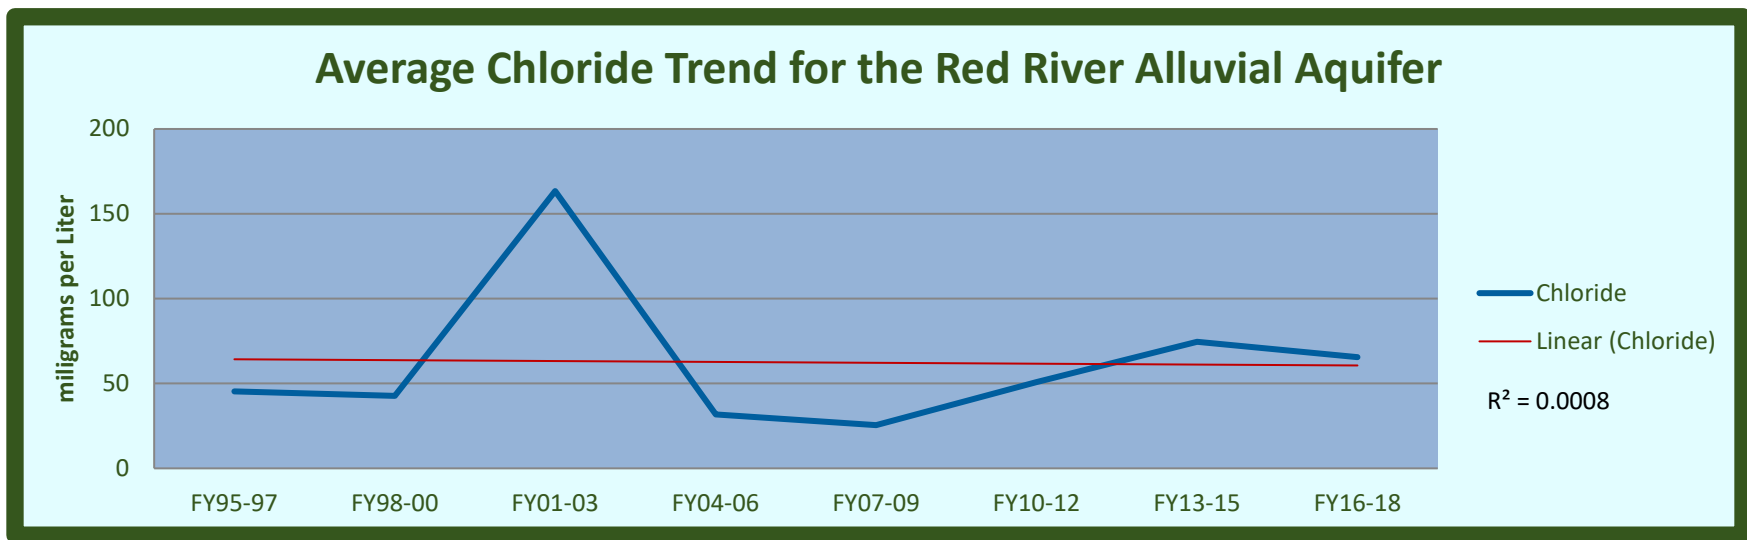


Chart 3-6: Total Dissolved Solids Trend

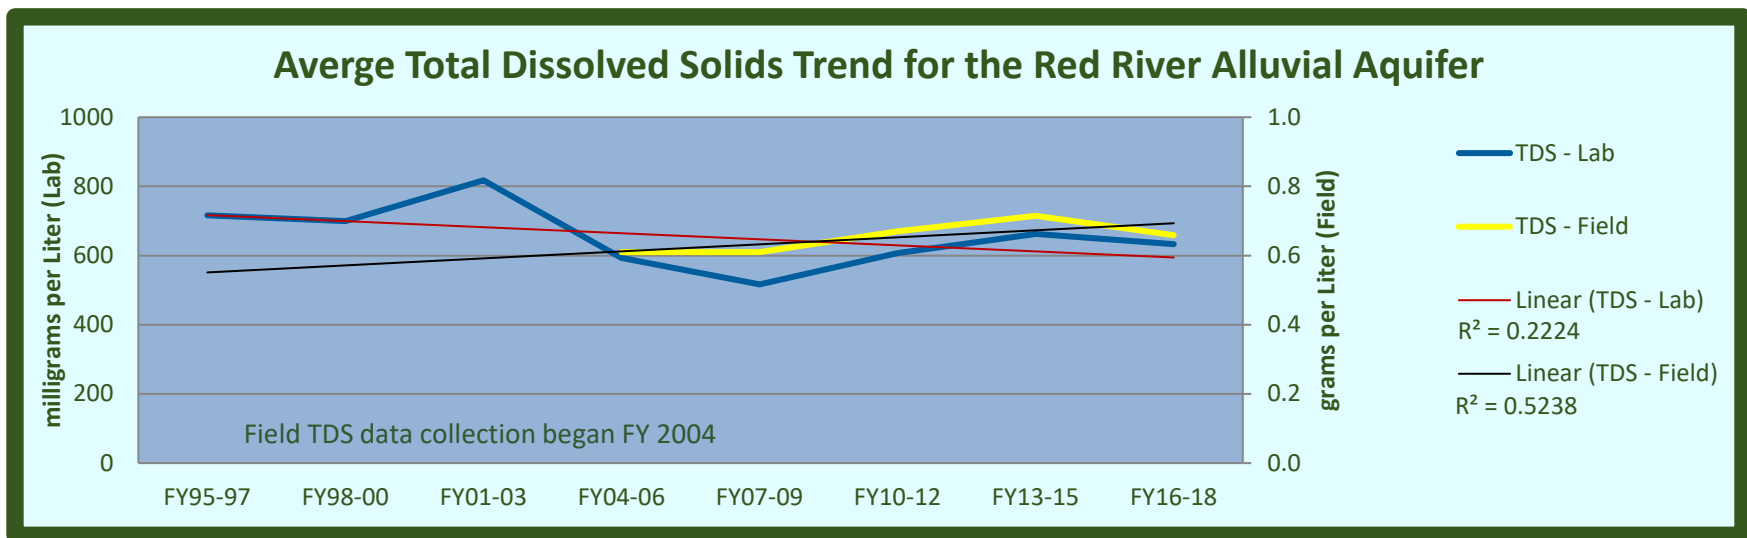


Chart 3-7: Alkalinity Trend

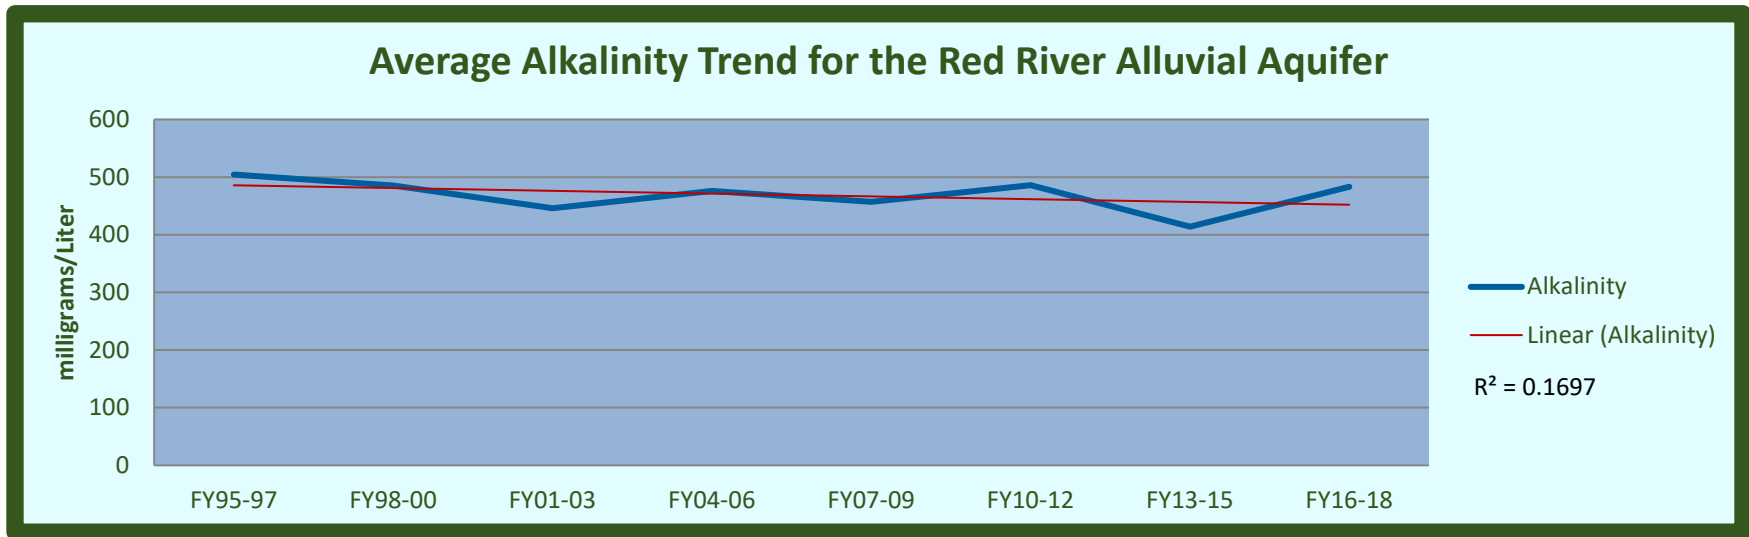


Chart 3-8: Hardness Trend

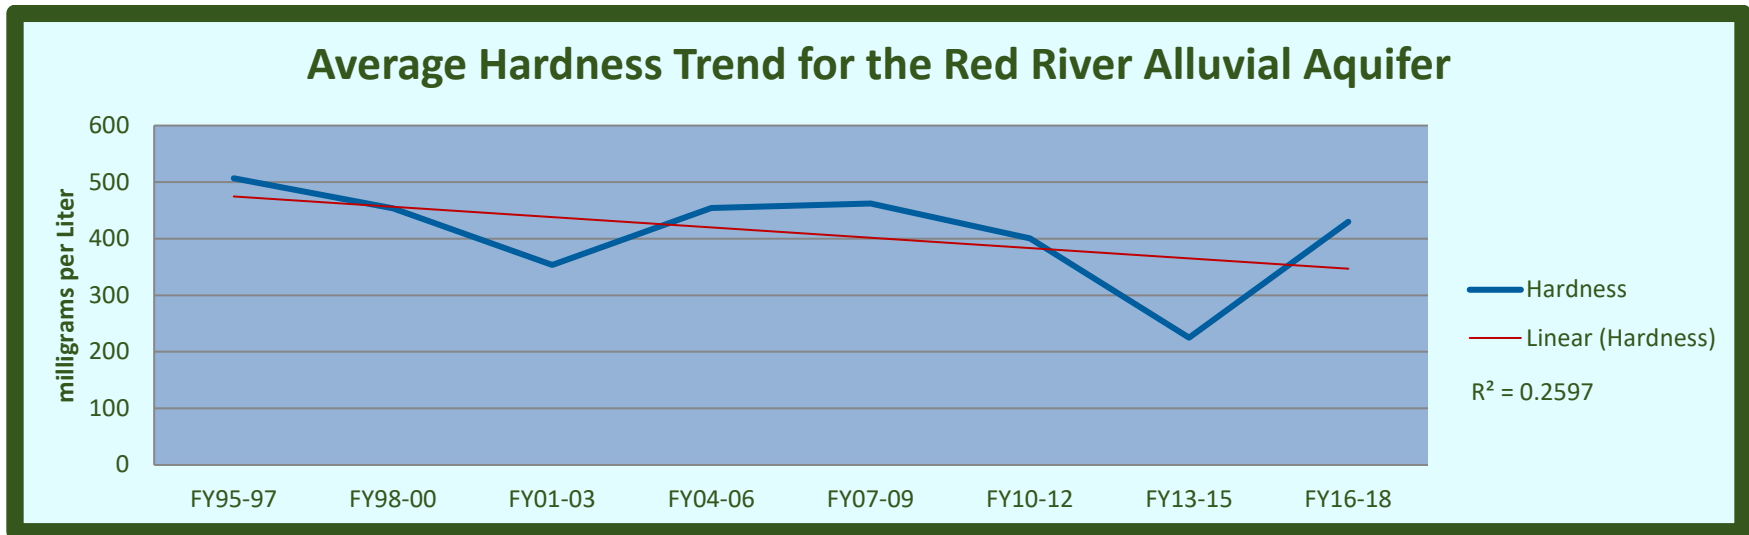


Chart 3-9: Sulfate Trend

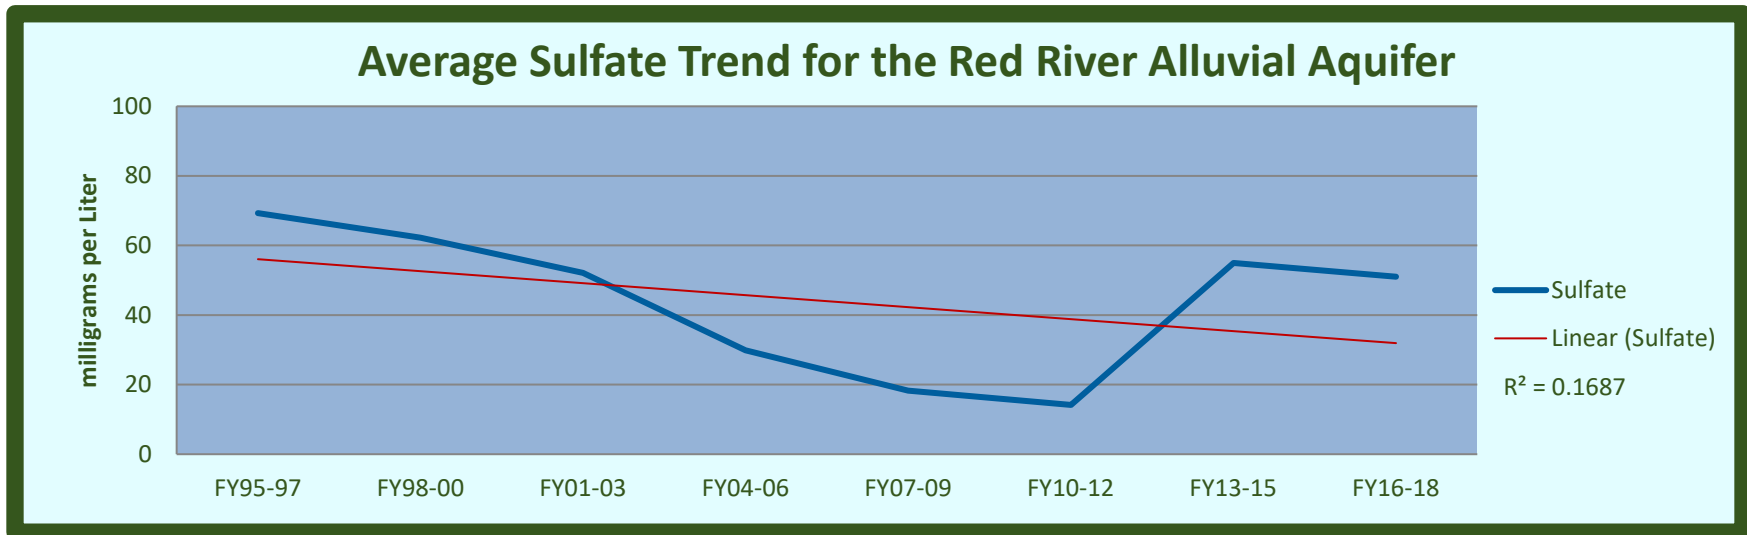


Chart 3-10: Color Trend

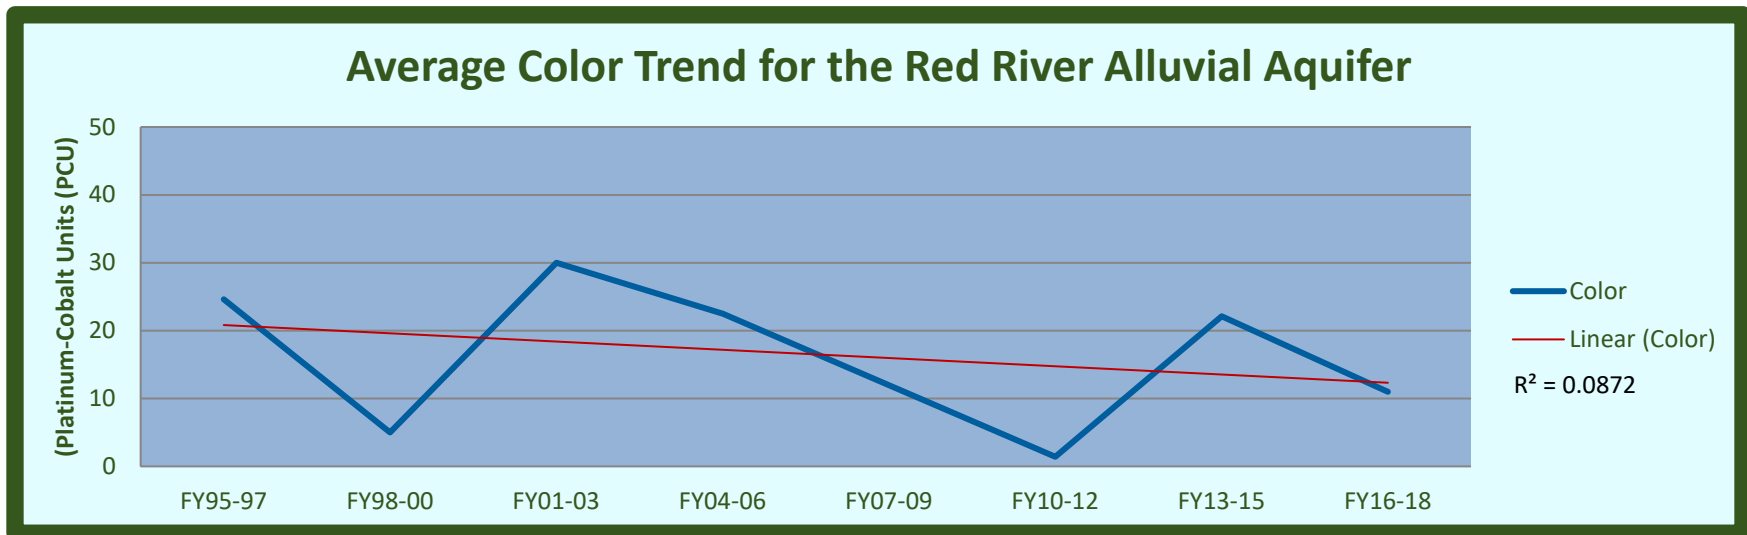


Chart 3-11: Ammonia Trend

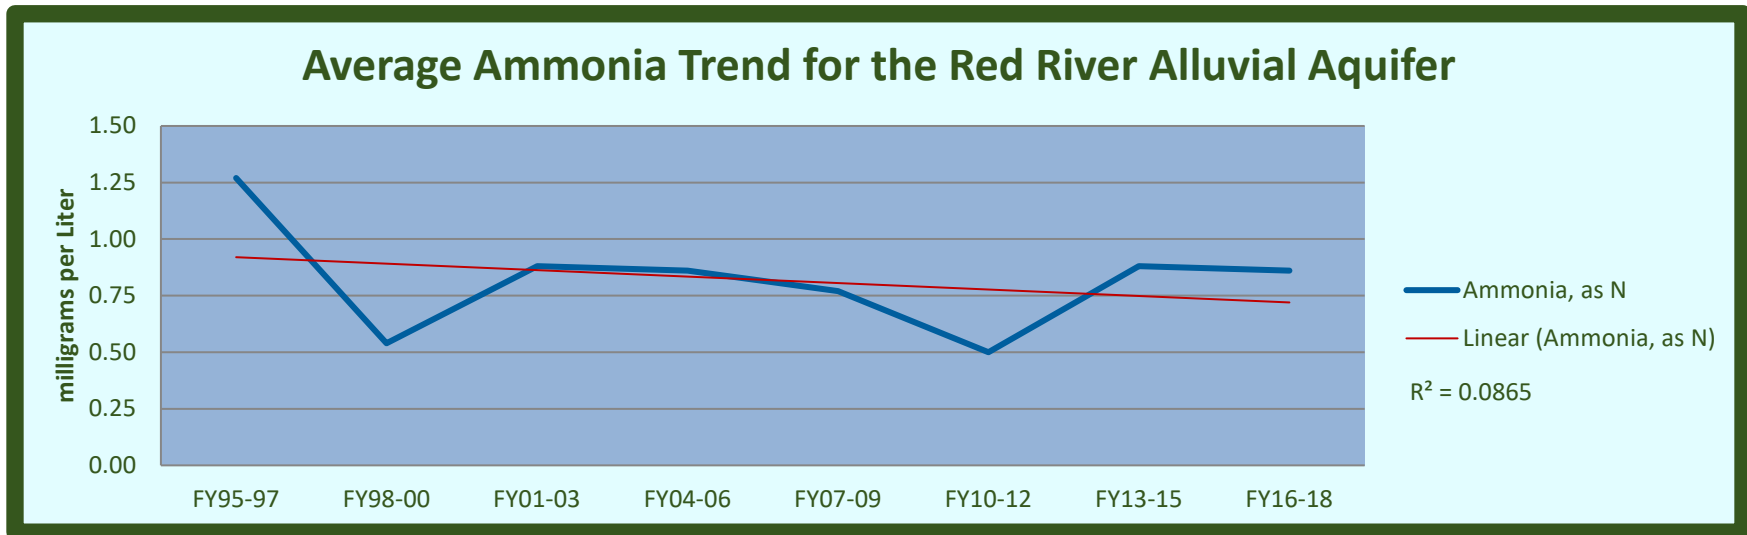


Chart 3-12: Nitrite - Nitrate Trend

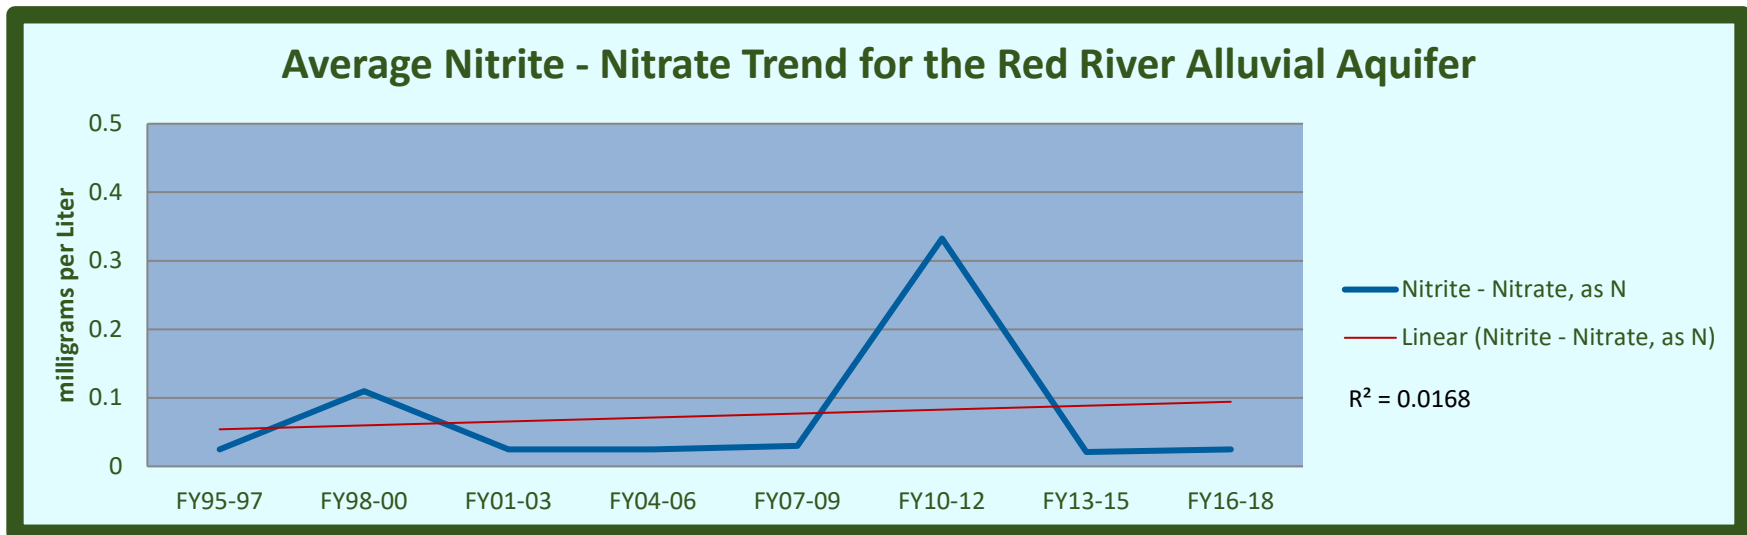


Chart 3-13: Total Kjeldahl Trend

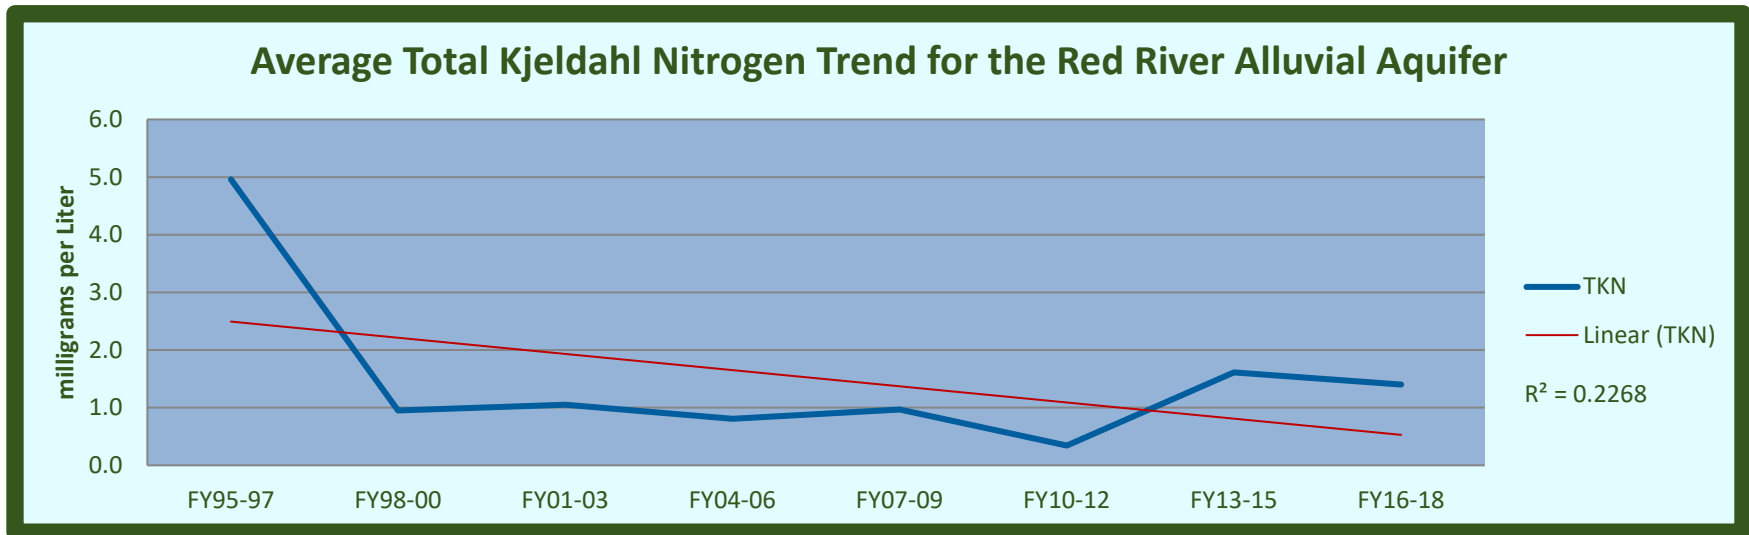


Chart 3-14: Total Phosphorus Trend

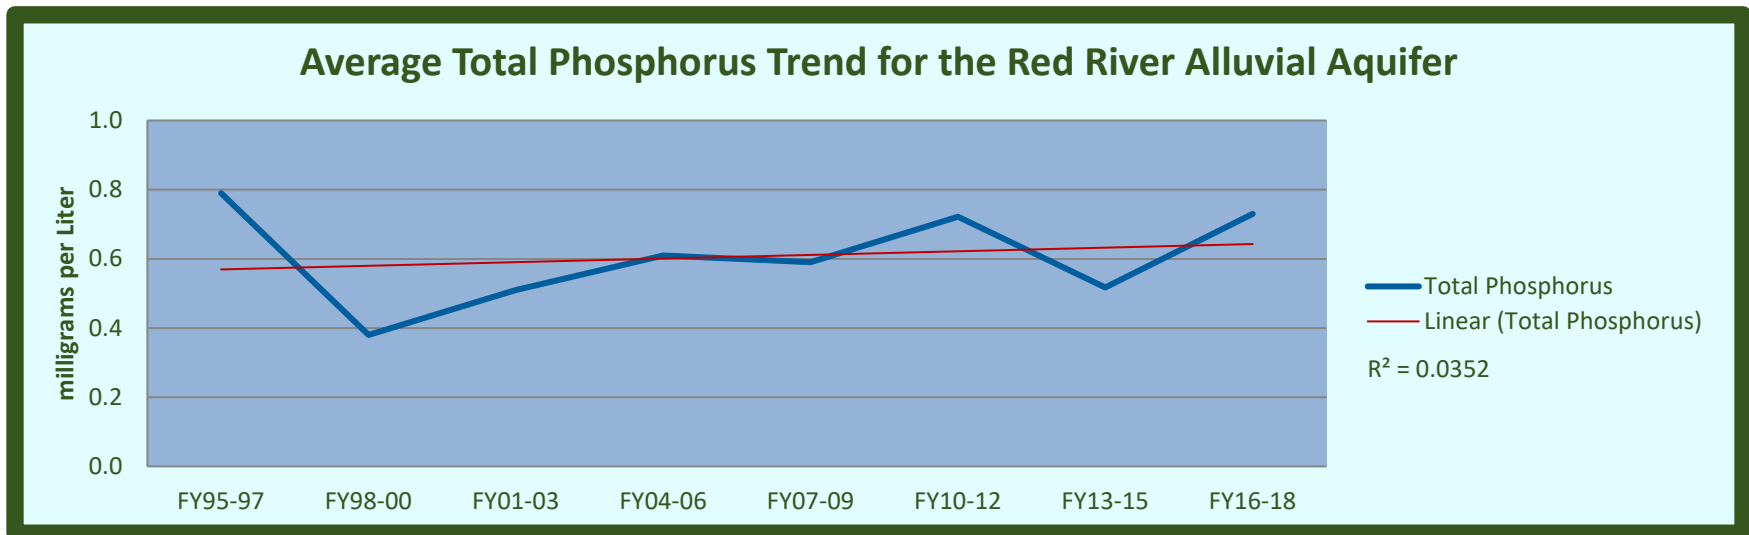


Chart 3-15: Barium Trend

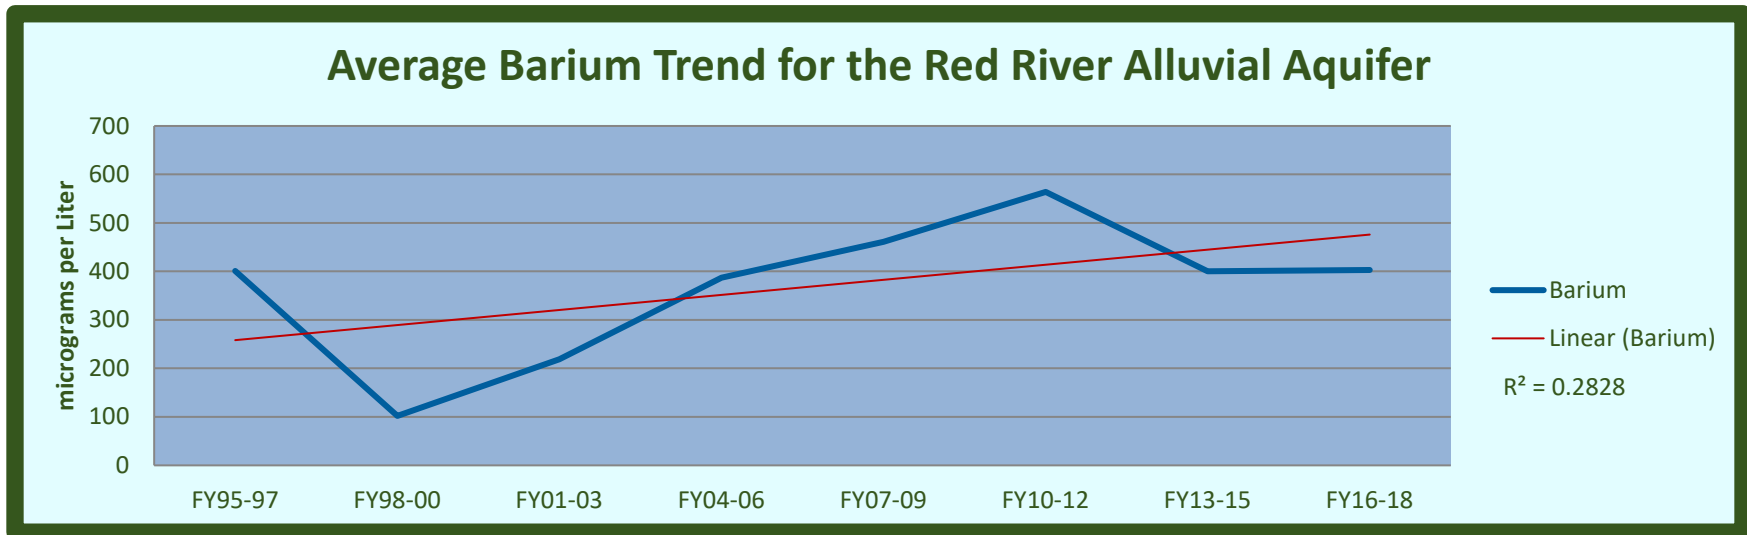


Chart 3-16: Copper Trend

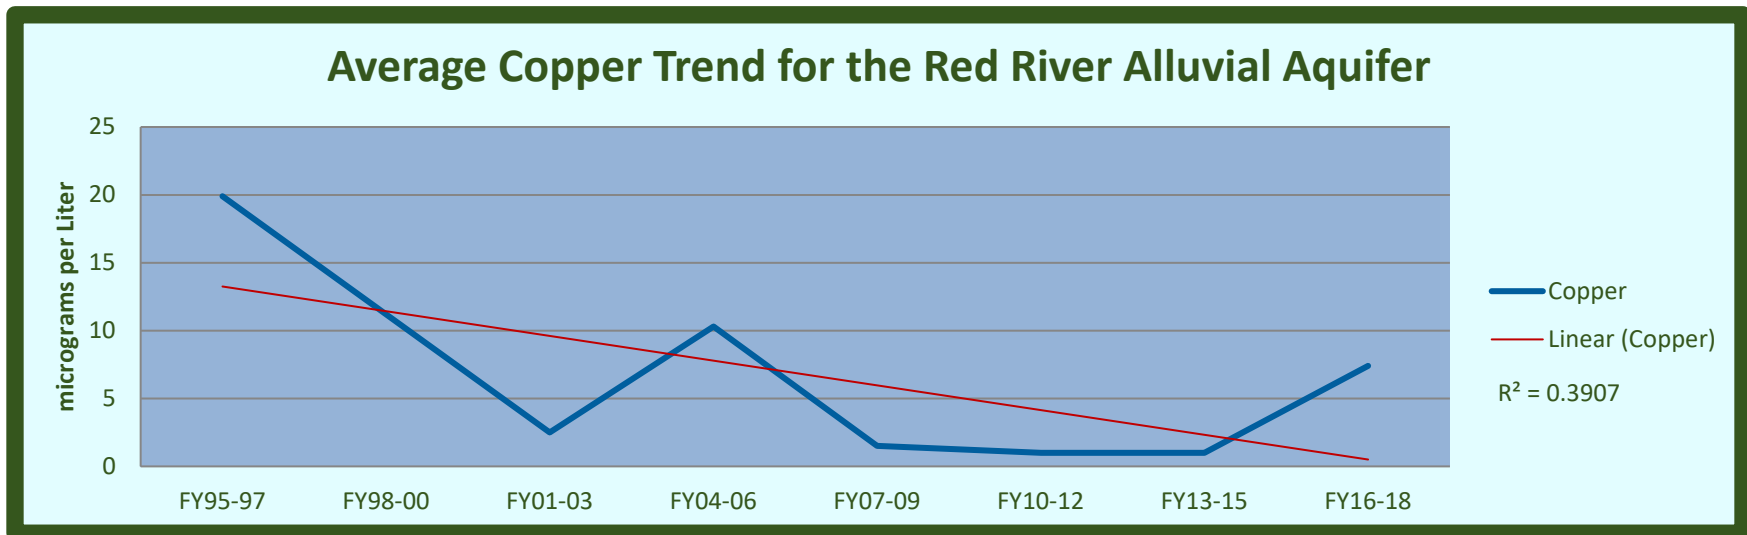


Chart 3-17: Iron Trend

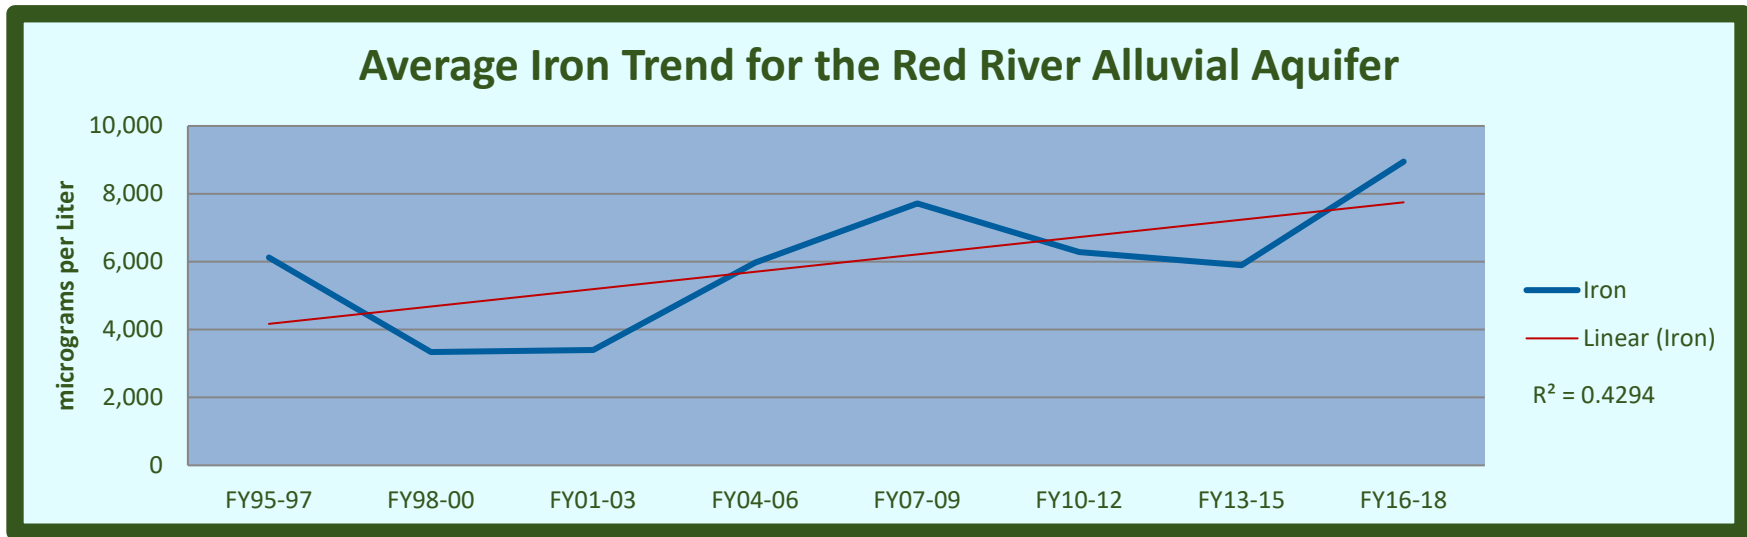


Chart 3-18: Zinc Trend

